Dener BS 3106 swing beam guillotine shear (3,120 x 6 mm)

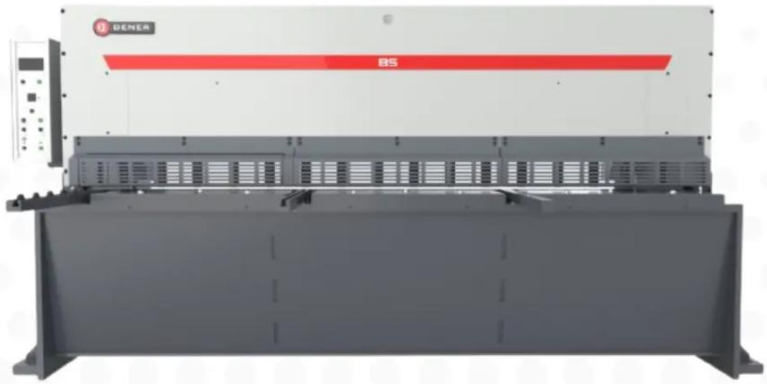

Référence interne :

CARACTERISTIQUES:
CNC CONTROL: HT071 positioner with 100 programs
SAFETY AND CE STANDARDS: Front light curtains for finger protection

Equipment:
- Manual blade gap adjustment
- Programmable cutting length adjustment
- Front ball transfer tables
- Back gauge on ballscrews, L = 1000 mm
- Front finger guard, retractable over 1 metre
- 1 front squaring arm, 1000 mm
- 2 front support arms
- LED cutting line illumination
- Adjustable cutting line
- Top blades with 2 cutting edges
- Bottom blades with 4 cutting edges
- CE-compliant machine

Photos :