

SBM - XL S2B2



Référence interne :

CARACTERISTIQUES:

- Separate oxide layer removal possible
- Separate edge rounding possible
- SMART-GRINDING-APROOFED
- Ideal preparation for coating
- Energy saving

Photos :

Image 2 - SBM - XL S2B2 - LISSMAC.webp



Image 3 - SBM - XL S2B2 - LISSMAC.webp

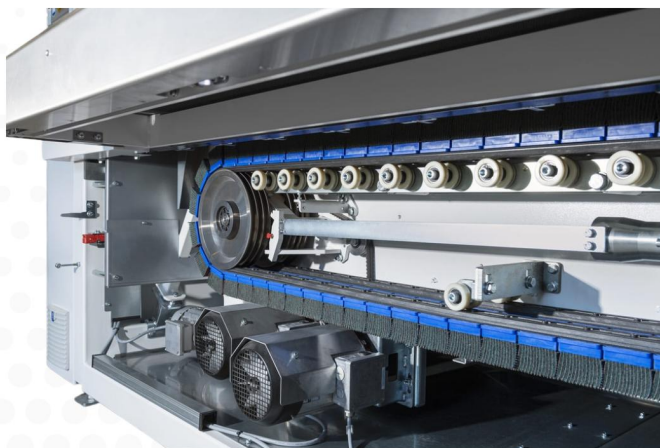


Image 4 - SBM - XL S2B2 - LISSMAC.webp

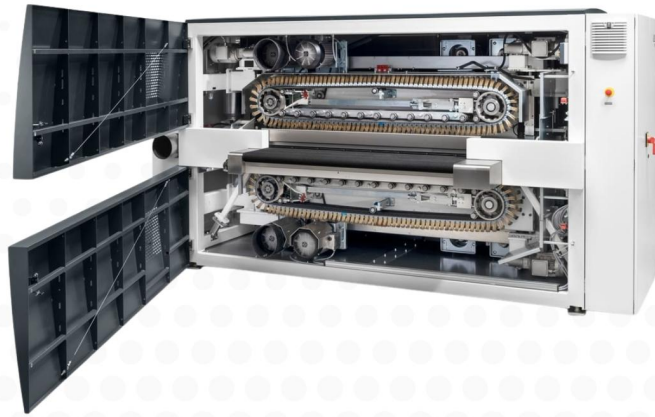


Image 5 - SBM - XL S2B2 - LISSMAC (1).webp



Image 5 - SBM - XL S2B2 - LISSMAC.webp

